


STRIDEN⁺ BATTERIES

Mobility Battery Catalogue

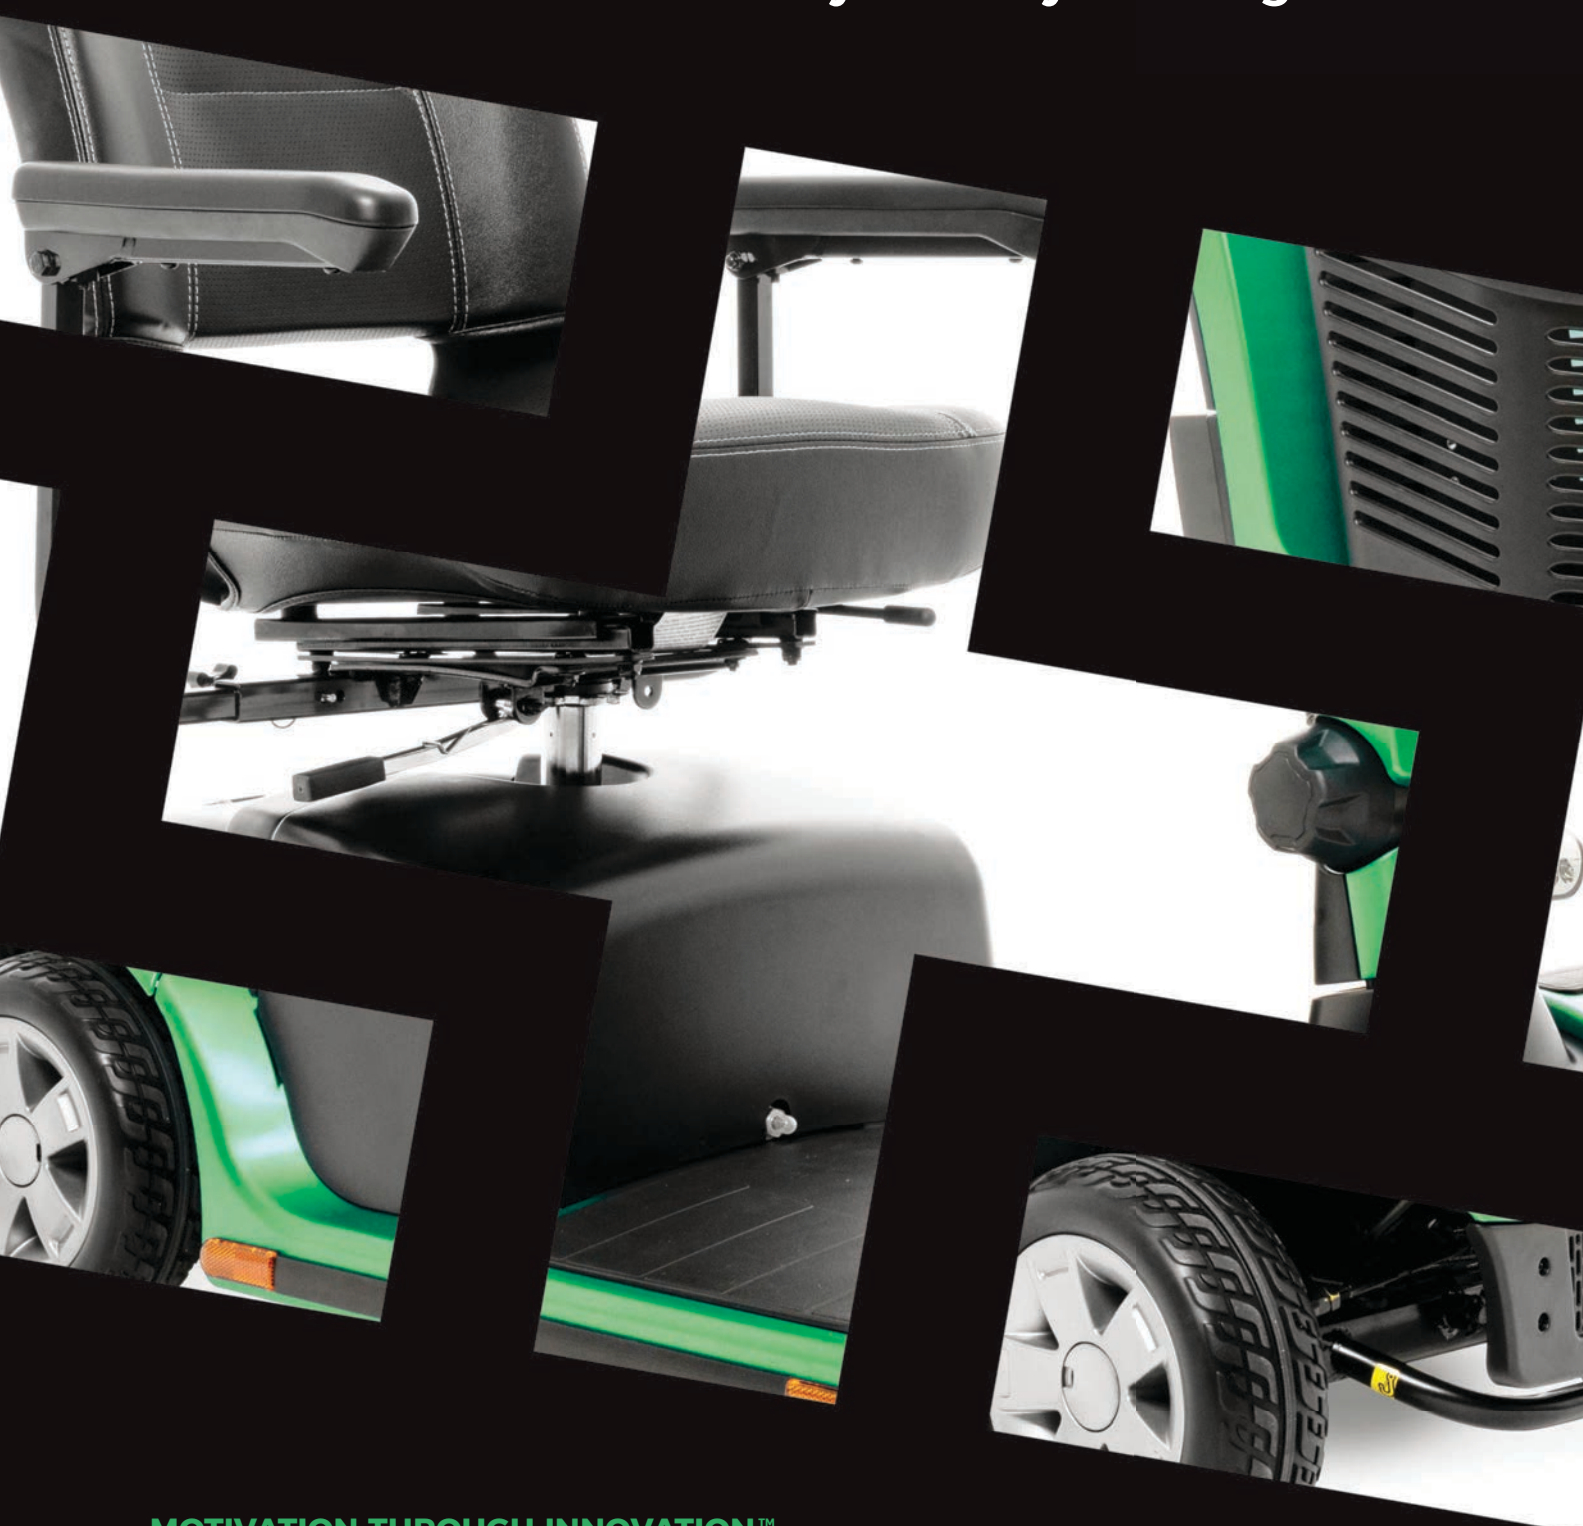

MOTIVATION THROUGH INNOVATION™

Battery Catalogue 2021-2022

Strident - a name you can trust for performance and reliability

A careful selection of only the highest quality raw materials, consistent quality control throughout the entire production process and painstaking attention to every detail gives the Strident range its unique properties that can be trusted and relied upon in many vital applications.

Valve Regulated

The highest specification of valve equipment is used in the Strident brand to allow the required level of venting both in use and more importantly during the charge process.

Quality Assured

Every Strident battery undergoes stringent quality control both at manufacture stage and pre-despatch ensuring you receive only the most reliable source of power. Our highly automated central UK warehousing facilities operates a strict FIFO stock rotation system resulting in all goods despatched being in peak condition every time.

Plate Separator

A critical component to high performing batteries. Strident use superior glass matting to ensure consistent plate contact resulting in increased battery efficiency and longevity.

Plate Composition

Purified lead specifically blended with critical conductive properties gives the Strident range superior performance during both cyclic and standby applications.



With over 20 years experience, Strident are perfectly placed to offer the widest range of high quality battery products to a wide range of battery power reliant industries and applications.

All Strident batteries are designed and manufactured to ensure they meet the stringent quality control standards that all Strident products must adhere to.

Only products that demonstrate a proven high level of performance and integrity become part of the Strident range of mobility products and accessories.

Our range of AGM, GEL and Small Cell batteries offer excellent longevity and reliability. This comprehensive range is suitable for a wide range of applications and battery reliant equipment.

Please contact our sales team to find out more about the full Strident range of products.

UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22

sales@strident.uk.com

www.stridentbatteries.com

Contents

AGM Batteries **4**

GEL Batteries **6**

Terminal Adaptors **7**

Small Cell Batteries **7**





GP6-1.2

Voltage & Capacity: 6V 1.2Ah
Dimensions mm (l x w x h):
97 x 24 x 52
Total Height mm: 58
Quantity/Ctn: 20

T: F1



GP6-12

Voltage & Capacity: 6V 12Ah
Dimensions mm (l x w x h):
151 x 50 x 94
Total Height mm: 100
Quantity/Ctn: 10

T: F1



GP12-0.8

Voltage & Capacity: 12V 0.8Ah
Dimensions mm (l x w x h):
96 x 25 x 61.5
Total Height mm: 61.5

T: VHR-2N



GP12-1.2

Voltage & Capacity: 12V 1.2Ah
Dimensions mm (l x w x h):
97 x 43 x 52
Total Height mm: 58
Quantity/Ctn: 20

T: F1



GP12-2.3

Voltage & Capacity: 12V 2.3Ah
Dimensions mm (l x w x h):
178 x 35 x 61
Total Height mm: 67
Quantity/Ctn: 10

T: F1



GP12-2.3C

Voltage & Capacity: 12V 2.3Ah
Dimensions mm (l x w x h):
182 x 24 x 61
Total Height mm: 61
Quantity/Ctn: 10

Side Contact



GP12-2.6

Voltage & Capacity: 12V 2.6Ah
Dimensions mm (l x w x h):
178 x 35 x 61
Total Height mm: 67
Quantity/Ctn: 10

T: F1



GP12-2.6S

Voltage & Capacity: 12v 2.6Ah
Dims (l x w x h): 70 x 47 x 97mm
Total Height: 103mm
Quantity/Ctn: 10

T: F1



GP12-2.9

Voltage & Capacity: 12V 2.9Ah
Dimensions mm (l x w x h):
79 x 56 x 99
Total Height mm: 104
Quantity/Ctn: 10

T: F1



GP12-3.2

Voltage & Capacity: 12V 3.2Ah
Dimensions mm (l x w x h):
134 x 67 x 61
Total Height mm: 67
Quantity/Ctn: 10

T: F1



GP12-4

Voltage & Capacity: 12V 4Ah
Dimensions mm (l x w x h):
195 x 47 x 71
Total Height mm: 76
Quantity/Ctn: 10

T: F1



GP12-5

Voltage & Capacity: 12V 5Ah
Dimensions mm (l x w x h):
90 x 70 x 101
Total Height mm: 107
Quantity/Ctn: 10

T: F1



UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22

sales@striden.uk.com

www.stridenbatteries.com

AGM Batteries



GP12-7

Voltage & Capacity: 12V 7Ah
Dimensions mm (l x w x h):
151 x 65 x 95
Total Height mm: 101
Quantity/Ctn: 8



GP12-7FR

Voltage & Capacity: 12V 7Ah
Fire Retardant
Dimensions mm (l x w x h):
151 x 65 x 95
Total Height mm: 101
Quantity/Ctn: 8



GP12-9

Voltage & Capacity: 12V 9Ah
Dimensions mm (l x w x h):
151 x 65 x 95
Total Height mm: 101
Quantity/Ctn: 8



GP12-10

Voltage & Capacity: 12V 10Ah
Dimensions mm (l x w x h):
151 x 65 x 111
Total Height mm: 117
Quantity/Ctn: 5



GP12-12

Voltage & Capacity: 12V 12Ah
Dimensions mm (l x w x h):
151 x 98 x 95
Total Height mm: 101
Quantity/Ctn: 4



GP12-14

Voltage & Capacity: 12V 14Ah
Dimensions mm (l x w x h):
151 x 98 x 95
Total Height mm: 101
Quantity/Ctn: 4



GP12-20

Voltage & Capacity: 12V 20Ah
Dimensions mm (l x w x h):
181 x 77 x 167
Total Height mm: 167
Quantity/Ctn: 2



GP12-22

Voltage & Capacity: 12V 22Ah
Dimensions mm (l x w x h):
181 x 77 x 167
Total Height mm: 167
Quantity/Ctn: 2



GP12-25

Voltage & Capacity: 12V 25Ah
Dimensions mm (l x w x h):
166 x 175 x 125
Total Height mm: 125
Quantity/Ctn: 2



GP12-34

Voltage & Capacity: 12V 34Ah
Dimensions mm (l x w x h):
197 x 131 x 159
Total Height mm: 168
Quantity/Ctn: 2



GP12-36

Voltage & Capacity: 12V 36Ah
Dimensions mm (l x w x h):
197 x 131 x 155
Total Height mm: 168
Quantity/Ctn: 2



GP12-42

Voltage & Capacity: 12V 42Ah
Dimensions mm (l x w x h):
198 x 166 x 170
Total Height mm: 170
Quantity/Ctn: 1



UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22

sales@strident.uk.com

www.stridentbatteries.com

AGM Batteries



GP12-45

Voltage & Capacity: 12V 45Ah
Dimensions mm (l x w x h):
 198 x 166 x 170
Total Height mm: 170
Quantity/Ctn: 1

T: Insert M6



GP12-50

Voltage & Capacity: 12V 50Ah
Dimensions mm (l x w x h):
 198 x 166 x 170
Total Height mm: 170
Quantity/Ctn: 1

T: Insert M6



GP12-55

Voltage & Capacity: 12V 55Ah
Dimensions mm (l x w x h):
 229 x 138 x 208
Total Height mm: 213
Quantity/Ctn: 1

T: Insert M6



GP12-75

Voltage & Capacity: 12V 75Ah
Dimensions mm (l x w x h):
 258 x 166 x 206
Total Height mm: 215
Quantity/Ctn: 1

T: Insert M6



GP12-100

Voltage & Capacity: 12V 100Ah
Dimensions mm (l x w x h):
 330 x 171 x 215
Total Height mm: 220
Quantity/Ctn: 1

T: Insert M6



GP24-2.3

Voltage & Capacity: 24V 2.3Ah
Dimensions mm (l x w x h):
 182 x 24 x 122
Total Height mm: 122
Quantity/Ctn: 1

Side Contact



GEL Batteries



GF12-25YG

Voltage & Capacity:
 12V 28Ah
Dimensions mm (l x w x h):
 197 x 132 x 180
Total Height mm:
 180
Quantity/Ctn: 2

M6 Bolt & Nut



GF12-33YG2

Voltage & Capacity:
 12V 38Ah
Dimensions mm (l x w x h):
 210 x 175 x 175
Total Height mm:
 175
Quantity/Ctn: 1

M6 Bolt & Nut



GF12-44Y

Voltage & Capacity:
 12V 50Ah
Dimensions mm (l x w x h):
 261 x 135 x 230
Total Height mm:
 220
Quantity/Ctn: 1

T: A



GF12-51Y1

Voltage & Capacity:
 12V 56Ah
Dimensions mm (l x w x h):
 278 x 175 x 190
Total Height mm:
 190
Quantity/Ctn: 1

T: A



UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22

sales@striden.uk.com

www.stridenbatteries.com

GEL Batteries



GF12-52YO

Voltage & Capacity: 12V 60Ah
Dimensions mm (l x w x h):
261 x 170 x 178
Total Height mm: 178
Quantity/Ctn: 1

T: Insert M6



GF12-63YO

Voltage & Capacity: 12V 70Ah
Dimensions mm (l x w x h):
261 x 171 x 210
Total Height mm: 210
Quantity/Ctn: 1

T: Insert M6



GF12-94Y

Voltage & Capacity: 12V 110Ah
Dimensions mm (l x w x h):
286 x 269 x 230
Total Height mm: 230
Quantity/Ctn: 1

T: A



Terminal Adaptors




M6APL

Terminal: Auto Post
Connects to: M6 Insert
Quantity: Pair
Material: Lead Composite



M6ABL

Terminal: Auto Post
Connects to: M6 Insert
Quantity: Pair
Material: Brass



ZKKABEL552

Terminal: F1 Small Tab
Connects to: F2 Large tab
Quantity: 10 Pairs



ZKKABEL550


Terminal: F2 Large tab
Connects to: F1 Small Tab
Quantity: 10 Pairs

Small Cell



AA

Quantity: 10
Brands may vary from those shown



AAA

Quantity: 10
Brands may vary from those shown



C

Quantity: 10
Brands may vary from those shown



PP3

Quantity: 10
Brands may vary from those shown

UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22

sales@strident.uk.com

www.stridentbatteries.com

MOTIVATION THROUGH INNOVATION™



Head office address: 50 Turbine Way, Ecotech Business & Innovation Park, Swaffham, PE37 7XD

UK central sales line:

Tel: 0845 555 55 11 | Fax: 0845 555 55 22 | sales@strident.uk.com

Northern office: Tel: +44 (0)1302 365987 | Fax: +44 (0)1302 365988

Southern office: Tel: +44 (0)1362 300102 | Fax: +44 (0)1362 300103

www.stridentbatteries.com

All specifications correct at the time of publishing.

In line with our policy of continual product development, we reserve the right to change product specifications without prior notice.

Literature Code: IV4/2021MB

© Ivanhoe Trading Limited 2021

Strident Batteries is a
Strident Innovations brand

STRIDENT
INNOVATIONS